


AMH950WS 6.5kW 32A 1 Phase



Buttress Group Ltd.
Top Station Road, Brackley,
Northants NN13 7UG, UK

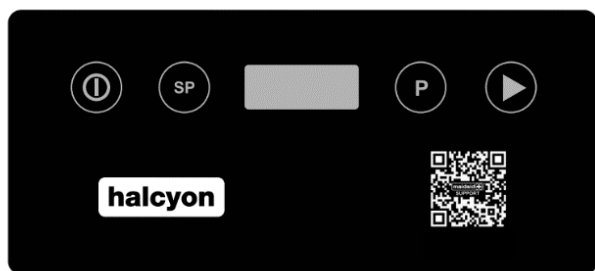

	Overall dimensions (W x D x H)	mm	633 x 750 x 1485* (1934)* (inc. feet)
↖ ↘	Packaging dimensions (W x D x H)	mm	760 x 840 x 1520
	Gross weight	kg	95
	Net weight	kg	80
	Cubic Volume	m ³	0.98
📏	Rack size (W x D x H)	mm	500 x 500 x 105
	Door opening	mm	420
	Max useable height	mm	400
	Rack guide rails		St/St frame with composite guides
🔧	Body construction		single skin
	Tank construction		moulded
	Tank volume	L	15
	Tank heating element	kW	2.0 (without Thermofuse)
🚿	Surface scrap trays		composite (2.5mm mesh)
	Wash arms (with cleaning port)		parallel (quick release)
	Wash pump type		dual flow
	Wash pump power	kW	0.47
🌡️	Pre-set wash temperatures	°C	60 (Pr1,Pr2,Pr3 adjustable)
	Boiler type		open
	Boiler volume	L	7.0
	Breaktank		yes
🔥	Boiler heating element	kW	6.0 (2+2+2 without Thermofuse)
	Rinse booster pump		yes
	Rinse booster pump power	kW	0.2
	Pre-set rinse temperatures	°C	82 (Pr1,Pr2,Pr3 adjustable)
🚰	Rinse arms		parallel (quick release)
	Drain system		partial drain
	Drain filter		double filter
	Drain pump		yes (built into sump)
💧	Rinse aid dispenser	peristaltic	yes
	Detergent dispenser	peristaltic	yes
🔌	Water softener		yes
	Water consumption per cycle	L	1.4-2.2
🍽️	Inlet water pressure	bar	1.0-4.0
	Inlet water temperature	°C	10-50
⚡	Total programs	programs	7
	Total power	kW	6.5
⚡	Fuse	A	32
	Electric connection (as supplied)	V-PH-HZ	230-240V 1N 50Hz
	Configurable to		4.5kW / 20A (1 Phase)
	Configurable to		6.5kW / 16A (3 Phase)



	Display	Time (sec)
P button	Pr1	85
	Pr2	115
	Pr3	130
	dr	variable
	CLEn	variable
SP button	Pr6	150
	LonG	600

Supplied with (Standard configuration)

Open glass rack	1
Pegged dish rack	1
Single cutlery rack	1
Electric cable (H07RN-F 3G6)	1
Drain hose (Ø Int 19mm, Ext 24mm)	1
Fill hose (3/4" BSP)	1
Feet	4




*Minimum height (+60mm with adjustable feet) †Minimum height with hood open (+60mm with adjustable feet)
Maidaid reserve the right to alter specification & dimensions without prior notification, all dimensions will be +/- 3mm. Machines fitted to cold water supply may not be capable of running repeated short cycles. The cycle time will be automatically extended to allow for recovery of correct operating temperatures.

T: 03451 308 070
E: sales@maidaid-halcyon.co.uk
Issue: 3.1 31/07/26

AMH950WS 6.5kW 32A 1 Phase



Buttress Group Ltd.
Top Station Road, Brackley,
Northants NN13 7UG, UK

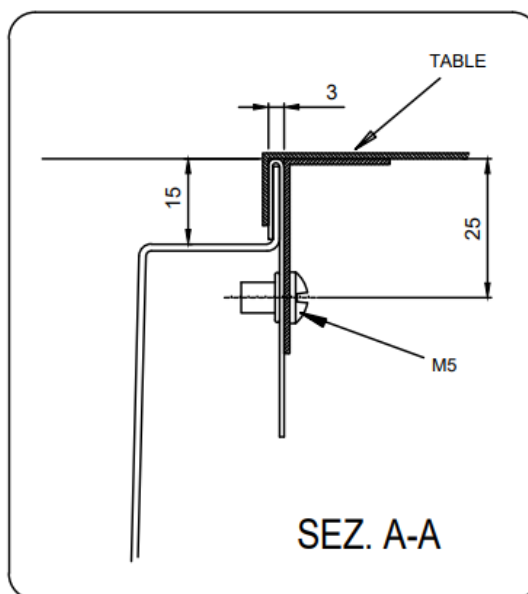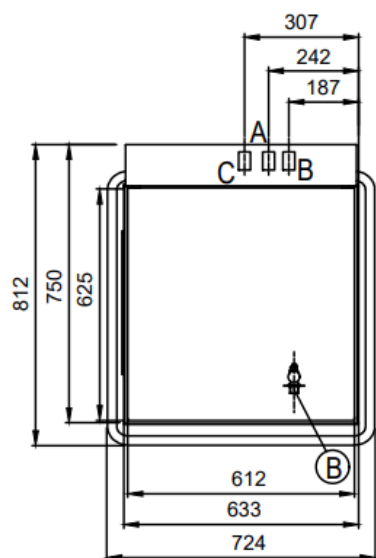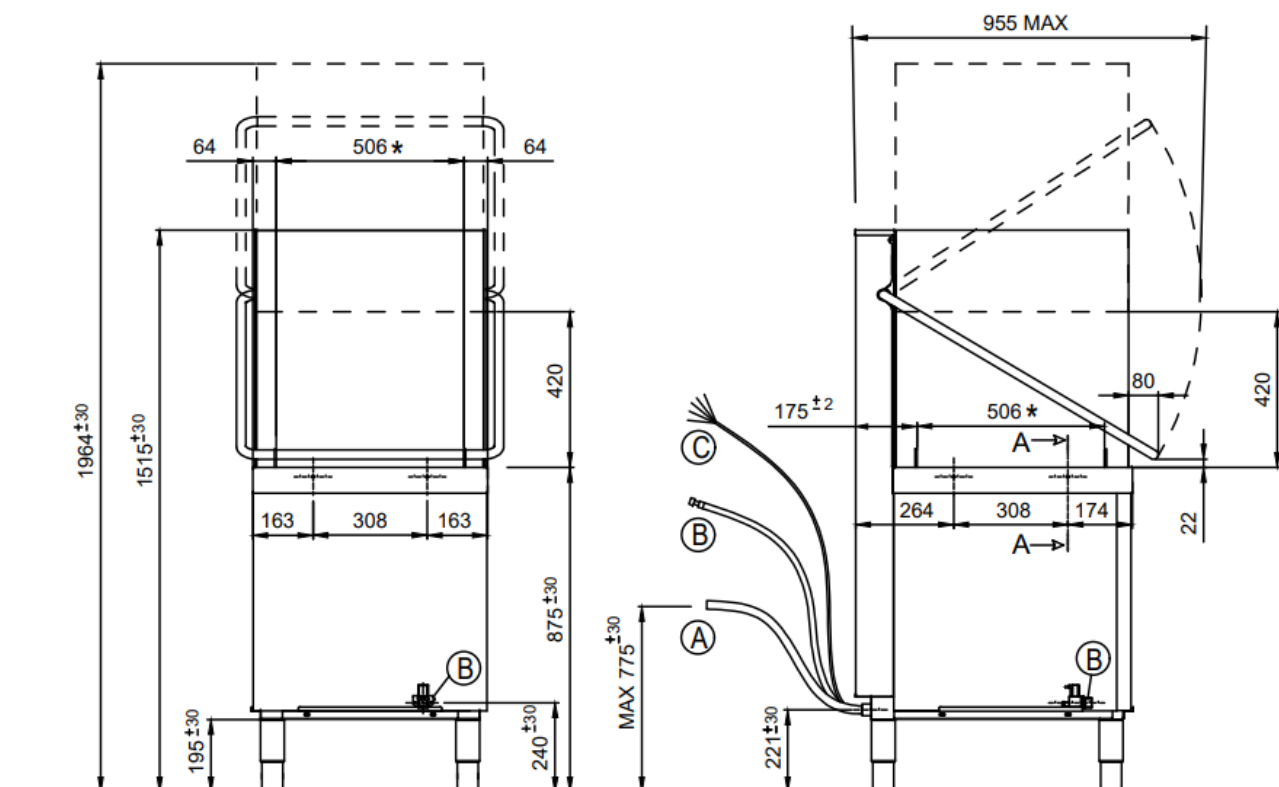

A		Ø 32 mm
B		G 3/4"
C		Power supply

All services must be within 1 metre. All dimensions in mm.

*Minimum height (+60mm with adjustable feet) †Minimum height with hood open (+60mm with adjustable feet)
Maidaid reserve the right to alter specification & dimensions without prior notification, all dimensions will be +/- 3mm. Machines fitted to cold water supply may not be capable of running repeated short cycles. The cycle time will be automatically extended to allow for recovery of correct operating temperatures.

T: 03451 308 070
E: sales@maidaid-halcyon.co.uk
Issue: 3.1 31/07/26