


# AMH950WS 8.5kW 16A 3 Phase



**Buttress Group Ltd.**  
Top Station Road, Brackley,  
Northants NN13 7UG, UK

|  |                                   |                |                                          |
|--|-----------------------------------|----------------|------------------------------------------|
|  | Overall dimensions (W x D x H)    | mm             | 633 x 750 x 1485* (1934)*<br>(inc. feet) |
|  | Packaging dimensions (W x D x H)  | mm             | 760 x 840 x 1520                         |
|  | Gross weight                      | kg             | 95                                       |
|  | Net weight                        | kg             | 80                                       |
|  | Cubic Volume                      | m <sup>3</sup> | 0.98                                     |
|  | Rack size (W x D x H)             | mm             | 500 x 500 x 105                          |
|  | Door opening                      | mm             | 420                                      |
|  | Max useable height                | mm             | 400                                      |
|  | Rack guide rails                  |                | St/St frame with composite guides        |
|  | Body construction                 |                | single skin                              |
|  | Tank construction                 |                | moulded                                  |
|  | Tank volume                       | L              | 15                                       |
|  | Tank heating element              | kW             | 2.0 (without Thermofuse)                 |
|  | Surface scrap trays               |                | composite (2.5mm mesh)                   |
|  | Wash arms (with cleaning port)    |                | parallel (quick release)                 |
|  | Wash pump type                    |                | dual flow                                |
|  | Wash pump power                   | kW             | 0.47                                     |
|  | Pre-set wash temperatures         | °C             | 60 (Pr1,Pr2,Pr3 adjustable)              |
|  | Boiler type                       |                | open                                     |
|  | Boiler volume                     | L              | 7.0                                      |
|  | Breaktank                         |                | yes                                      |
|  | Boiler heating element            | kW             | 8.0 (2.6 + 2.6 + 2.6 without Thermofuse) |
|  | Rinse booster pump                |                | yes                                      |
|  | Rinse booster pump power          | kW             | 0.2                                      |
|  | Pre-set rinse temperatures        | °C             | 82 (Pr1,Pr2,Pr3 adjustable)              |
|  | Rinse arms                        |                | parallel (quick release)                 |
|  | Drain system                      |                | partial drain                            |
|  | Drain filter                      |                | double filter                            |
|  | Drain pump                        |                | yes (built into sump)                    |
|  | Rinse aid dispenser               | peristaltic    | yes                                      |
|  | Detergent dispenser               | peristaltic    | yes                                      |
|  | Water softener                    |                | yes                                      |
|  | Water consumption per cycle       | L              | 1.4-2.2                                  |
|  | Inlet water pressure              | bar            | 1.0-4.0                                  |
|  | Inlet water temperature           | °C             | 10-50                                    |
|  | Total programs                    | programs       | 7                                        |
|  | Total power                       | kW             | 8.5                                      |
|  | Fuse                              | A              | 16                                       |
|  | Electric connection (as supplied) | V-PH-HZ        | 400V 3+N 50Hz                            |
|  | Configurable to                   |                | n/a                                      |

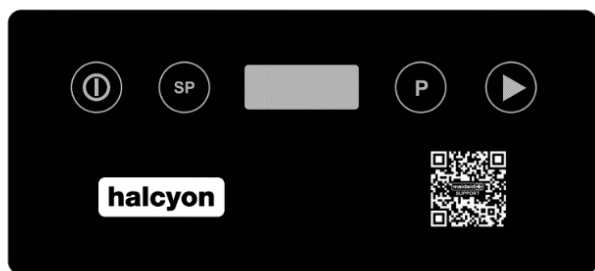

|           | Display | Time (sec) |
|-----------|---------|------------|
| P button  | Pr1     | 85         |
|           | Pr2     | 115        |
|           | Pr3     | 130        |
|           | dr      | variable   |
|           | CLEn    | variable   |
| SP button | Pr6     | 150        |
|           | Long    | 600        |

## Supplied with (Standard configuration)

|                                   |   |
|-----------------------------------|---|
| Open glass rack                   | 1 |
| Pegged dish rack                  | 1 |
| Single cutlery rack               | 1 |
| Electric cable (H07RN-F 5G2.5)    | 1 |
| Drain hose (Ø Int 19mm, Ext 24mm) | 1 |
| Fill hose (3/4" BSP)              | 1 |
| Feet                              | 4 |




\*Minimum height (+60mm with adjustable feet) †Minimum height with hood open (+60mm with adjustable feet)  
Maidaid reserve the right to alter specification & dimensions without prior notification, all dimensions will be +/- 3mm. Machines fitted to cold water supply may not be capable of running repeated short cycles. The cycle time will be automatically extended to allow for recovery of correct operating temperatures.

T: 03451 308 070  
E: sales@maidaid-halcyon.co.uk  
Issue: 3.1 31/07/26

# AMH950WS 8.5kW 16A 3 Phase



**Buttress Group Ltd.**  
Top Station Road, Brackley,  
Northants NN13 7UG, UK

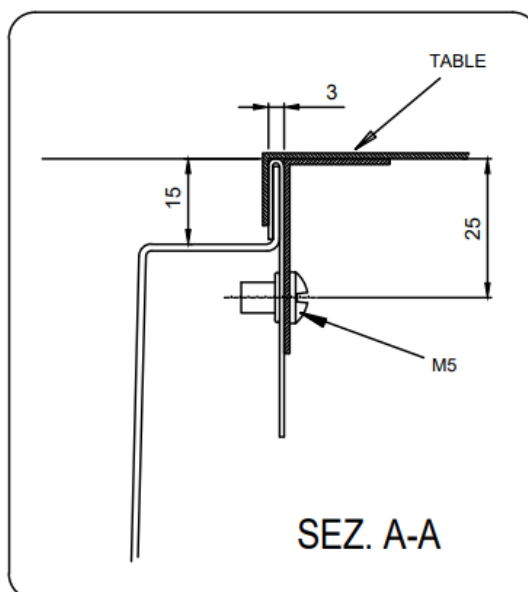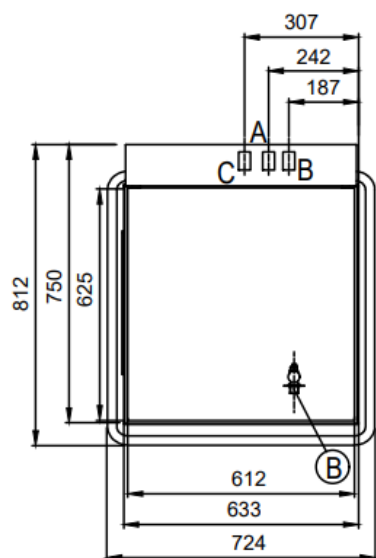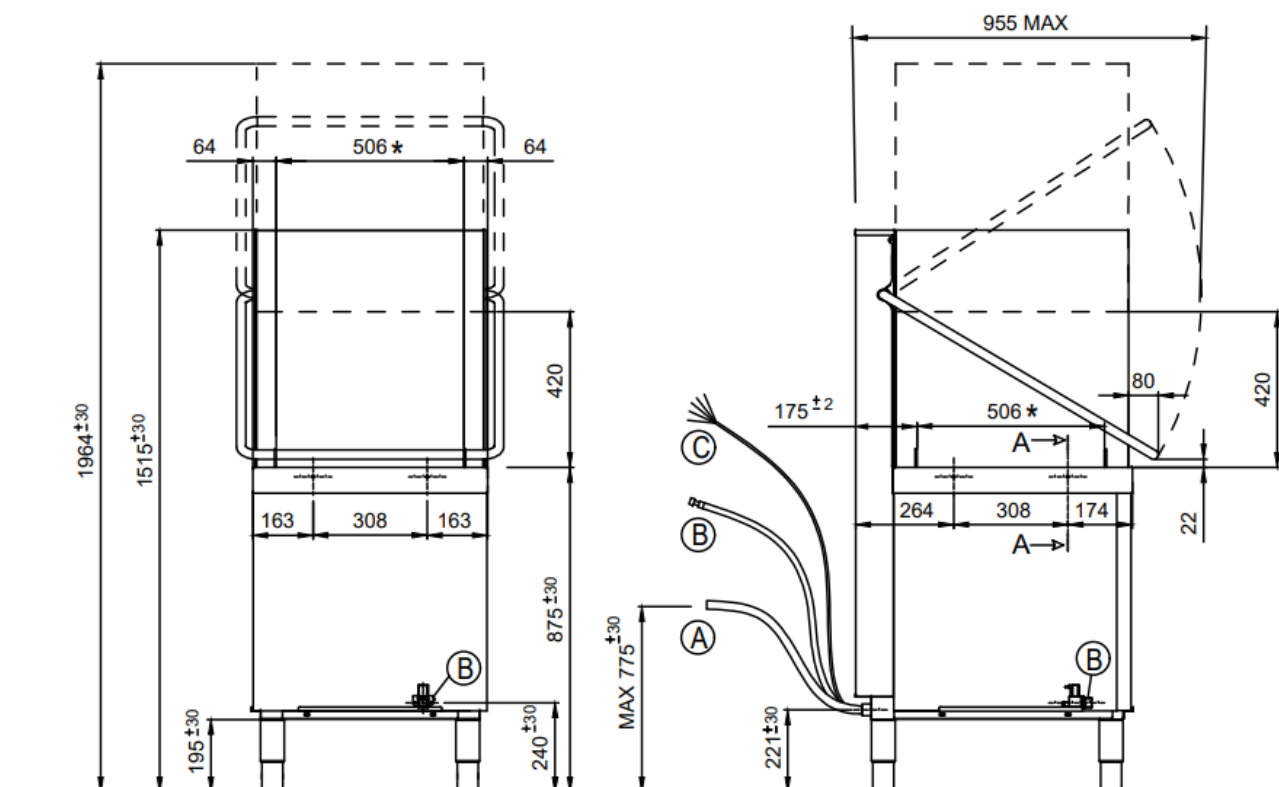

|   |  |              |
|---|--|--------------|
| A |  | Ø 32 mm      |
| B |  | G 3/4"       |
| C |  | Power supply |

All services must be within 1 metre. All dimensions in mm.

\*Minimum height (+60mm with adjustable feet) †Minimum height with hood open (+60mm with adjustable feet)  
Maidaid reserve the right to alter specification & dimensions without prior notification, all dimensions will be +/- 3mm. Machines fitted to cold water supply may not be capable of running repeated short cycles. The cycle time will be automatically extended to allow for recovery of correct operating temperatures.

T: 03451 308 070  
E: sales@maidaid-halcyon.co.uk  
Issue: 3.1 31/07/26