

C205WS

6.5kW 32A
1 Phase



Buttress Group Ltd.
Top Station Road, Brackley,
Northants NN13 7UG, UK



	Overall dimensions (W x D x H)	mm	633 x 750 x 1560* (2060)* (inc. feet)
↖ ↘	Packaging dimensions (W x D x H)	mm	760 x 840 x 1600
	Gross weight	kg	105
	Net weight	kg	89
	Cubic Volume	m ³	0.98
📏	Rack size (W x D x H)	mm	500 x 500 x 155
	Door opening	mm	470
	Max useable height	mm	440
	Rack guide rails		St/St frame with composite guides
	Body construction		single skin
	Tank construction		moulded
💧	Tank volume	L	20
	Tank heating element	kW	3.0 (3x1 with Thermofuse)
	Surface scrap trays		composite (2mm mesh)
🌡️	Wash arms (with cleaning port)		parallel (quick release)
	Wash pump type		dual flow
	Wash pump power	kW	0.47
	Pre-set wash temperatures	°C	60 (Pr1, Pr2, Pr3 adjustable)
🔧	Boiler type		open
	Boiler volume	L	7.0
	Breaktank		yes
	Boiler heating element	kW	6.0 (2+2+2 with Thermofuse)
🌡️	Rinse booster pump		yes
	Rinse booster pump power	kW	0.2
	Pre-set rinse temperatures	°C	82 (Pr1, Pr2, Pr3 adjustable)
	Rinse arms		parallel (quick release)
🚰	Drain system		partial drain
	Drain filter		triple filter
	Drain pump		yes (built into sump)
💧	Rinse aid dispenser	peristaltic	yes
	Detergent dispenser	peristaltic	yes
🔌	Water softener		yes
	Water consumption per cycle	L	1.4-4.0
🍽️	Inlet water pressure	bar	1.0-4.0
	Inlet water temperature	°C	10-50
	Total programs	programs	10
	Total power	kW	6.5
⚡	Fuse	A	32
	Electric connection (as supplied)	V-PH-HZ	230-240V 1N 50Hz
	Configurable to		4.5kW / 20A (1 Phase)
	Configurable to		6.5kW / 16A (3 Phase)

	Display	Time (sec)
P button	Pr1	75
	Pr2	95
	Pr3	115
	dr	variable
	CLEn	variable
SP button	Pr6	130
	bot1	variable
	bot2	variable
	GLS2	100
	LonG	600

Supplied with (Standard configuration)

Open glass rack	1
Pegged dish rack	1
Single cutlery rack	1
Electric cable (H07RN-F 3G6)	1
Drain hose (Ø Int 19mm, Ext 24mm)	1
Fill hose (3/4" BSP)	1
Feet	4

*Minimum height (+60mm with adjustable feet) †Minimum height with hood open (+60mm with adjustable feet)
Maidaid reserve the right to alter specification & dimensions without prior notification, all dimensions will be +/- 3mm. Machines fitted to cold water supply may not be capable of running repeated short cycles. The cycle time will be automatically extended to allow for recovery of correct operating temperatures.


T: 03451 308 070
E: sales@maidaid-halcyon.co.uk
Issue: 3.1 31/07/26

C205WS

6.5kW 32A
1 Phase



Buttress Group Ltd.
Top Station Road, Brackley,
Northants NN13 7UG, UK

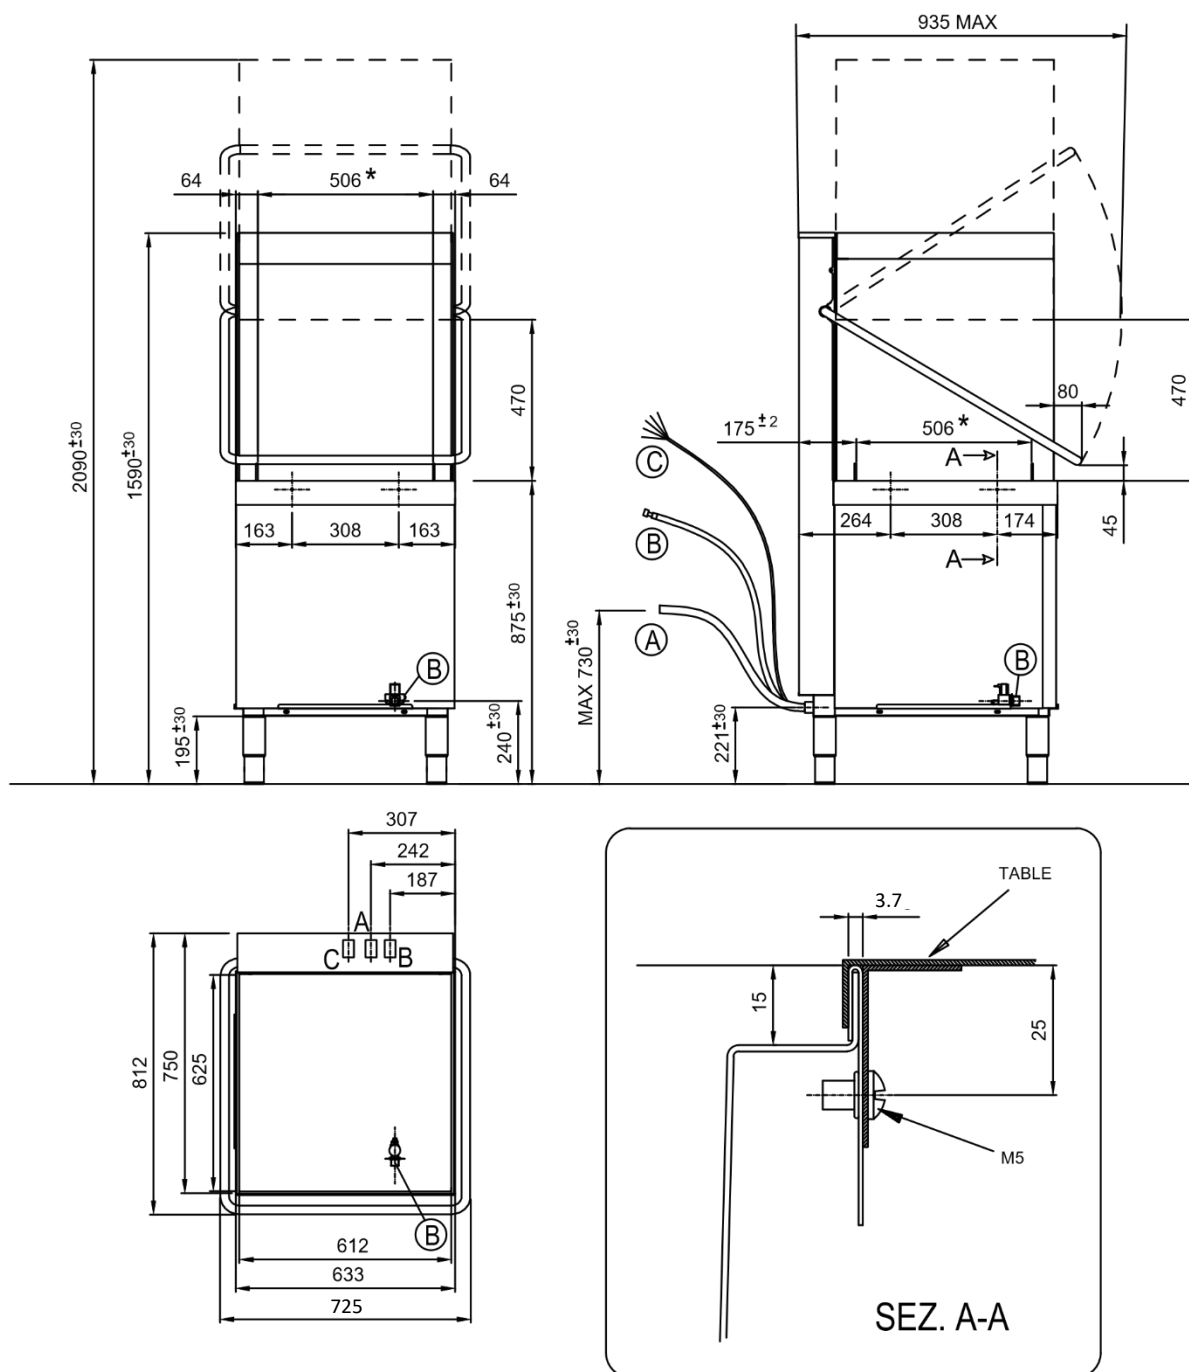

All dimensions in mm.

All services must be within 1 metre.

*Minimum height (+60mm with adjustable feet) †Minimum height with hood open (+60mm with adjustable feet)
Maidaid reserve the right to alter specification & dimensions without prior notification, all dimensions will be +/- 3mm. Machines fitted to cold water supply may not be capable of running repeated short cycles. The cycle time will be automatically extended to allow for recovery of correct operating temperatures.

T: 03451 308 070
E: sales@maidaid-halcyon.co.uk
Issue: 3.1 31/07/26