

C62D

**6.7kW 30A
1 Phase**



Buttress Group Ltd.
Top Station Road, Brackley,
Northants NN13 7UG, UK



	Overall dimensions (W x D x H)	mm	575 x 700 x 1235* (inc. feet)
	Packaging dimensions (W x D x H)	mm	670 x 780 x 1250
	Gross weight	kg	72
	Net weight	kg	64
	Cubic Volume	m ³	0.65
	Rack size (W x D x H)	mm	600 x 500 x 115
	Door opening	mm	405
	Max useable height	mm	370
	Rack guide rails		embossed
	Body construction		stratified double skin
	Tank construction		welded - stamped base
	Tank volume	L	23
	Tank heating element	kW	2.0 (without Thermofuse)
	Surface scrap trays		Stainless Steel (1.5mm mesh)
	Wash arms (with cleaning port)		tri-arm parallel (quick release)
	Wash pump type		dual flow
	Wash pump power	kW	0.7
	Pre-set wash temperatures	°C	60 (Pr1,Pr2,Pr3 adjustable)
	Boiler type		open
	Boiler volume	L	6.0
	Breaktank		yes
	Boiler heating element	kW	6.0 (2+2+2 without Thermofuse)
	Rinse booster pump		yes
	Rinse booster pump power	kW	0.15
	Pre-set rinse temperatures	°C	80 (Pr1,Pr2,Pr3 adjustable)
	Rinse arms		tri-arm parallel (quick release)
	Drain system		partial drain
	Drain filter		triple filter
	Drain pump		yes
	Rinse aid dispenser	peristaltic	yes
	Detergent dispenser	peristaltic	yes
	Water softener		no
	Water consumption per cycle	L	1.8-4.4
	Inlet water pressure	bar	1.0-4.0
	Inlet water temperature	°C	10-50
	Total programs	programs	10
	Total power	kW	6.7
	Fuse	A	30
	Electric connection (as supplied)	V-PH-HZ	230-240V 1N 50Hz
	Configurable to		6.7kW / 16A (3 Phase)
	Configurable to		4.7kW / 20A (1 Phase)
	Configurable to		2.7kW / 13A (1 Phase)



	Display	Time (sec)
P button	Pr1	65
	Pr2	85
	Pr3	105
	dr	variable
	CLEn	variable
SP button	Pr6	165
	Pt1	235
	Pt2	400
	GLS2	100
	LonG	600

Supplied with
(Standard configuration)

Open glass rack 500x500	1
Pegged dish rack 600x500	1
Single cutlery rack	1
Electric cable (H07RN-F 3G4)	1
Drain hose (Ø Int 19mm, Ext 24mm)	1
Fill hose (3/4" BSP)	1
Feet	4

*Minimum height (+60mm with adjustable feet). Maidaïd reserve the right to alter specification & dimensions without prior notification, all dimensions will be +/- 3mm. Machines fitted to cold water supply may not be capable of running repeated short cycles. The cycle time will be automatically extended to allow for recovery of correct operating temperatures.


T: 03451 308 070
E: sales@maidaïd-halcyon.co.uk
Issue: 3.1 31/07/26

C62D

6.7kW 30A
1 Phase



Buttress Group Ltd.
Top Station Road, Brackley,
Northants NN13 7UG, UK

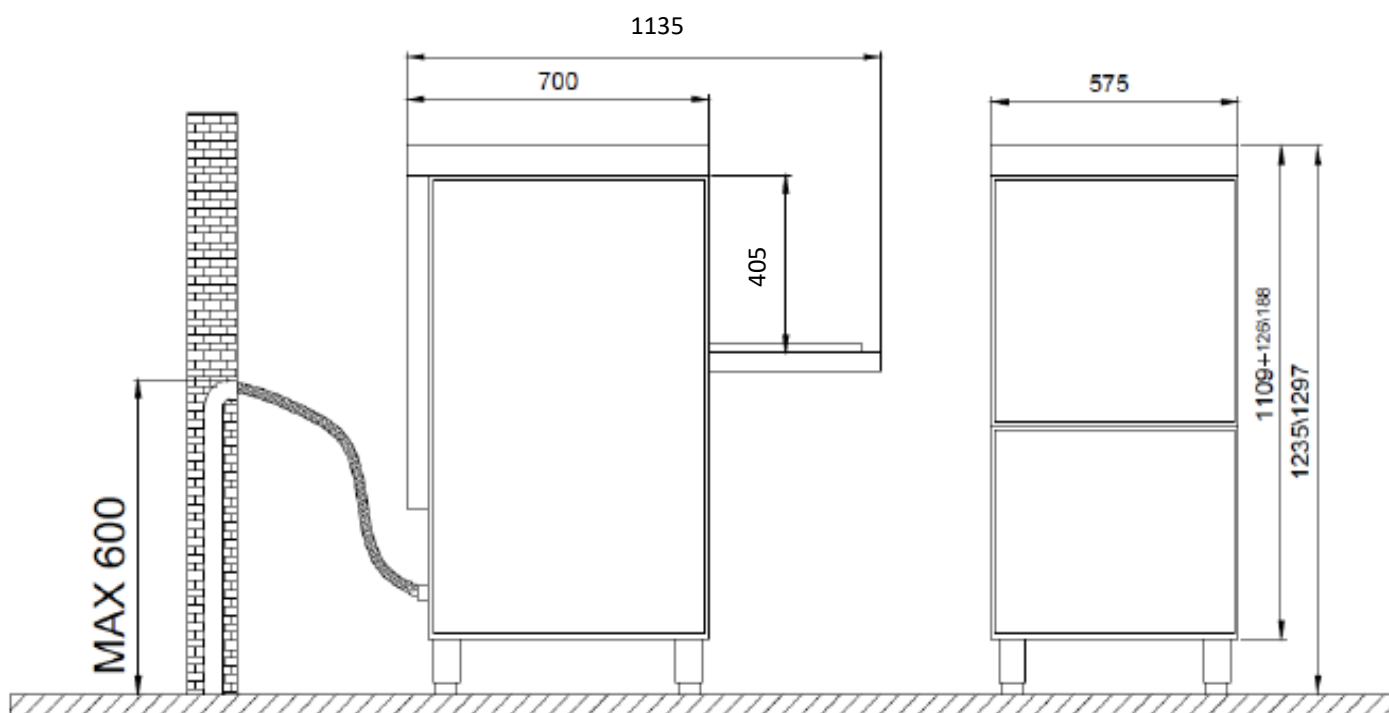

All services must be within 1 metre.
All dimensions in mm.

*Minimum height (+60mm with adjustable feet). Maidaid reserve the right to alter specification & dimensions without prior notification, all dimensions will be +/- 3mm. Machines fitted to cold water supply may not be capable of running repeated short cycles. The cycle time will be automatically extended to allow for recovery of correct operating temperatures.

T: 03451 308 070
E: sales@maidaid-halcyon.co.uk
Issue: 3.1 31/07/26