

# Maidaid icemaker


## CUBE 110-60DP

SELF-CONTAINED  
AIR COOLED  
ICE CUBE MACHINE  
230 V / 50 HZ



### CUBE 110-60DP Air Cooled Features

- **2 year warranty**
- Produces solid gourmet crystal clear ice cubes
- Supplied with internally fitted drain pump system as standard
- Electronic control that enhances the performance of the machine
- A3S: anti-scale spray system. The patented spray system with flexible nozzles avoids limescale deposits with small vibrations
- Smart front ventilation system (SFVS)
- Cleaning switch: disconnects the cooling system while circulating water with descaling product (calklin or similar)
- "Never stop" motor pump, designed without seals to prevent deterioration in hard water
- EASI: easy access for service & installation. All panels can be disassembled separately
- On/Off lighted rocker switch / pcb mounted at the bottom
- Height adjustable legs from 105mm to 155mm
- Environmentally friendly R290 gas which reduces energy consumption
- STIF: strong Inox fabrication. Solid structure supported in 4 steel columns. AISI 304 stainless steel body
- Machine supplied with 13 amp moulded plug and cable
- Strong door opening system. Door made in stainless steel AISI 304



Supplied with:



For additional information contact our Sales Team on

T: **0345 130 8070** E: **sales@maidaid-halcyon.co.uk** or visit **www.maidaid.co.uk**

# Maidaid icemaker

## CUBE 110-60DP

SELF-CONTAINED  
AIR COOLED  
ICE CUBE MACHINE  
230 V / 50 HZ



### Technical Data

		 (Kg)	 (Kg)	 (mm)	 (mm)	
<b>CUBE 110-60DP</b>		112	60	Width 715 Depth 700 Height 1,145 (including feet) (+40mm)	Width 790 Depth 765 Height 1,170	<b>22 gram</b> 35 (Ø) x 35 mm (H) Average dimensions

### Operating Conditions – Production 50Hz

- ±10% V
- 10°C/43°C
- 5°C/38°C
- 1 bar/6 bar
- 60 Ice cubes/cycle

V	Hz	ph
230	50	1N


CUBE 110-60DP AIR COOLED

	10° 50°	15° 60°	21° 70°	30° 86°
10° 50°	114	113	104	100
21° 68°	114	<b>112</b>	103	95
32° 90°	100	96	91	85
43° 109°	87	82	78	75

	(W)	(BTU/h)	(W) 43°C	(n.)	(mm <sup>2</sup> )	FUSE	100 Kg (Kwh)	(l/h)	HEAT REJECTED (W)	(BTU/h)	(Kg)	(Kg)	(m <sup>3</sup> )
<b>CUBE 110-60DP</b>	2,292	7,825	934	3	1.5	13	14.2	14.1	1,747	5,964	81	102	0.71

### Installation Diagram

All dimensions in mm

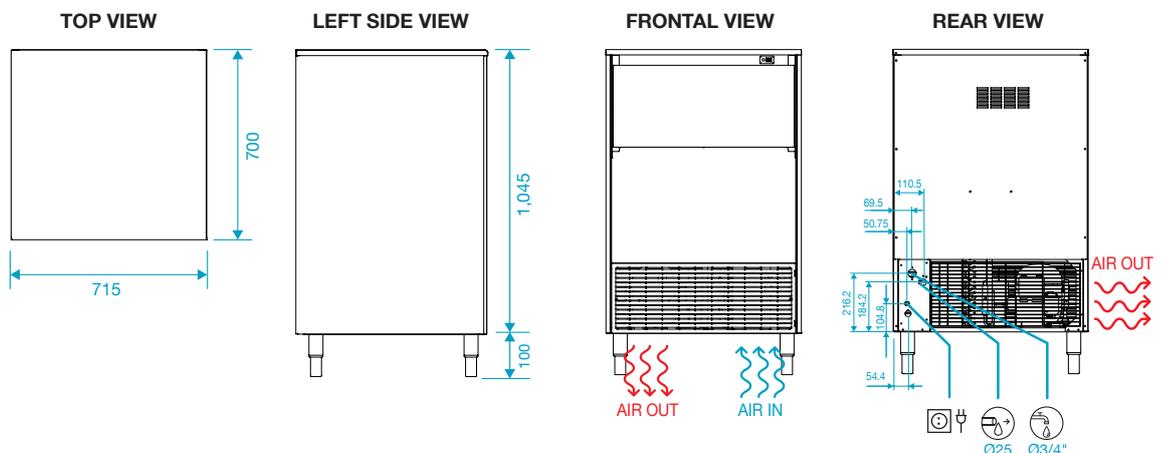

For additional information contact our Sales Team on

T: **0345 130 8070** E: **sales@maidaid-halcyon.co.uk** or visit **www.maidaid.co.uk**