

Maidaid icemaker


CUBE 60-25DP

SELF-CONTAINED
AIR COOLED
ICE CUBE MACHINE
230 V / 50 HZ



CUBE 60-25DP Air Cooled Features

- **2 year warranty**
- Produces solid gourmet crystal clear ice cubes
- Supplied with internally fitted drain pump system as standard
- Electronic control that enhances the performance of the machine
- A3S: anti-scale spray system. The patented spray system with flexible nozzles avoids limescale deposits with small vibrations
- Smart front ventilation system (SFVS)
- Cleaning switch: disconnects the cooling system while circulating water with descaling product (calklin or similar)
- “Never stop” motor pump, designed without seals to prevent deterioration in hard water
- EASI: easy access for service & installation. All panels can be disassembled separately
- On/Off lighted rocker switch / pcb mounted at the bottom
- Height adjustable legs from 105mm to 155mm
- Environmentally friendly R290 gas which reduces energy consumption
- STIF: strong Inox fabrication. Solid structure supported in 4 steel columns. AISI 304 stainless steel body
- Machine supplied with 13 amp moulded plug and cable
- Strong door opening system. Door made in stainless steel AISI 304



22
gram



A3S
Anti-scale
spray system



EASI
Easy Access
for Service &
Installation



STIF
Strong
Inox
Frame



**SILENT
RAIN**



**FRONT
VENTILATION**

Supplied with:



Water inlet filter
gasket



Water inlet
hose



Water outlet
hose



Medium
scoop



4 height adjustable
leg kit

For additional information contact our Sales Team on

T: **0345 130 8070** E: **sales@maidaid-halcyon.co.uk** or visit **www.maidaid.co.uk**

Maidaid icemaker

CUBE 60-25DP

SELF-CONTAINED
AIR COOLED
ICE CUBE MACHINE
230 V / 50 HZ



Technical Data

		 (Kg)	 (Kg)	 (mm)	 (mm)	
CUBE 60-25DP		55	25	Width 535 Depth 595 Height 890 (including feet)	Width 610 Depth 660 Height 1,020 (+40mm)	22 gram 39 (Ø) x 35 mm (H) Average dimensions

Operating Conditions – Production 50Hz

- ±10% V
- 10°C/43°C
- 5°C/38°C
- 1 bar/6 bar
- 36 Ice cubes/cycle


V	Hz	ph
230	50	1N

	CUBE 60-25DP AIR COOLED				
	°C	10°	15°	21°	30°
	°F	50°	60°	70°	86°
	10°	58	56	53	50
	21°	57	55	53	50
	32°	53	50	46	43
	43°	48	42	36	34
	109°				

		ASHRAE CONDITIONS								HEAT REJECTED				
		(W)	(BTU/h)							(W) 43°C	(Kg)	(Kg)	(m³)	
CUBE 60-25DP		1,266	4,322	440	3	1.5	13	14.90	5.9	884	3,018	56	61	0.41

Installation Diagram

All dimensions in mm

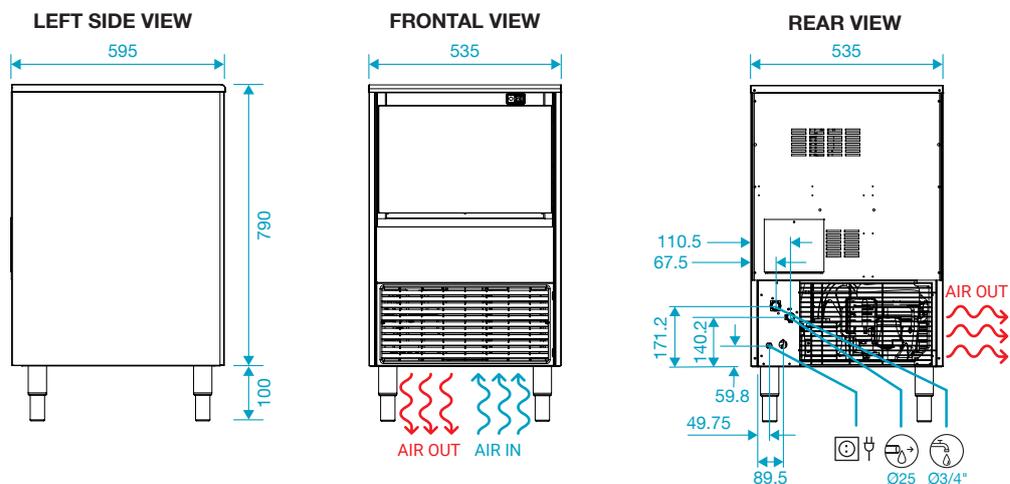

For additional information contact our Sales Team on

T: **0345 130 8070** E: **sales@maidaid-halcyon.co.uk** or visit **www.maidaid.co.uk**