

D201

6.5kW 32A 1 Phase



Buttress Group Ltd.
Top Station Road, Brackley,
Northants NN13 7UG, UK



	Overall dimensions (W x D x H)	mm	633 x 750 x 1560* (2060)* (inc. feet)
↙ ↘	Packaging dimensions (W x D x H)	mm	760 x 840 x 1600
	Gross weight	kg	99
	Net weight	kg	89
	Cubic Volume	m ³	0.98
📏	Rack size (W x D x H)	mm	500 x 500 x 155
	Door opening	mm	470
	Max useable height	mm	440
	Rack guide rails		St/St frame with composite guides
🔧	Body construction		double skin
	Hood / Door Construction		single skin
	Tank construction		moulded
	Tank volume	L	20
🔥	Tank heating element	kW	3.0 (3 x 1.0 with Thermofuse)
	Surface scrap trays		composite (2mm mesh)
	Wash arms (with cleaning port)		parallel (quick release)
	Wash pump type		dual flow
🌡️	Wash pump power	kW	0.7
	Pre-set wash temperatures	°C	60 (Pr1,Pr2,Pr3 adjustable)
	Boiler type		Open
	Boiler volume	L	7.0
🕒	Breaktank		yes
	Boiler heating element	kW	6.0 (2+2+2 with Thermofuse)
	Rinse booster pump		Yes
	Rinse booster pump power	kW	0.2
🌡️	Pre-set rinse temperatures	°C	82 (Pr1,Pr2,Pr3 adjustable)
	Rinse arms		parallel (quick release)
	Drain system		partial drain
	Drain filter		triple filter
🚰	Drain pump		yes (built into sump)
	Rinse aid dispenser	peristaltic	yes
	Detergent dispenser	peristaltic	yes
	Water softener		no
💧	Water consumption per cycle	L	1.4-4.0
	Inlet water pressure	bar	1.0-4.0
	Inlet water temperature	°C	10-50
	Total programs	programs	16
⚡	Total power	kW	6.5
	Fuse	A	32
	Electric connection (as supplied)	V-PH-HZ	230-240V 1N 50Hz
	Configurable to	kW-A-PH	4.5kW/ 20A single phase
	Configurable to	kW-A-PH	6.5kW / 16A three phase

	Display	Time (sec)
P button	Pr1	75
	Pr2	95
	Pr3	115
	d1	variable
	dr	variable
SP button	CLEn	variable
	GLS1	85
	GLS2	110
	Pr6	130
	PLA1	100
	CUP1	115
	bot1	variable
	bot2	variable
	A030	variable
	Pt1	315
	LonG	600

Supplied with (Standard configuration)

Pegged dish rack	1
Open glass rack	1
Single cutlery rack	1
Electric cable (H07RN-F 3G6)	1
Drain hose (Ø Int 25mm, Ext 31mm)	1
Fill hose (¾" BSP)	1
Feet (165/225mm)	4

*Minimum height (+60mm with adjustable feet) †Minimum height with hood open (+60mm with adjustable feet)
Maidaid reserve the right to alter specs & dimensions without prior notification, all dimensions will be +/- 3mm.
Machines fitted to cold water supply may not be capable of running repeated short cycles. The cycle time will be automatically extended to allow for recovery of correct operating temperatures.




T: 03451 308 070
E: sales@maidaid-halcyon.co.uk
Issue: 3.1 31/07/26

D201

6.5kW 32A 1 Phase



Buttress Group Ltd.
Top Station Road, Brackley,
Northants NN13 7UG, UK

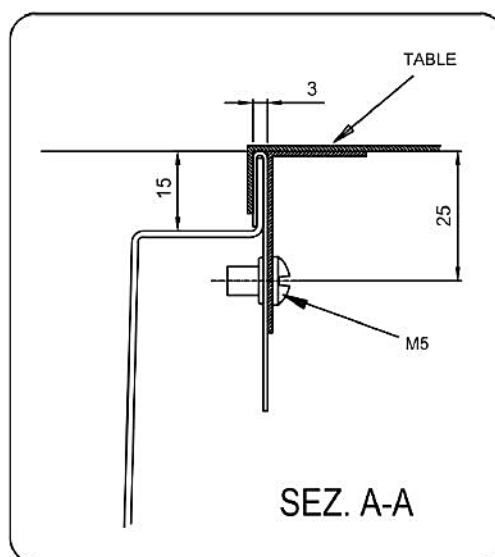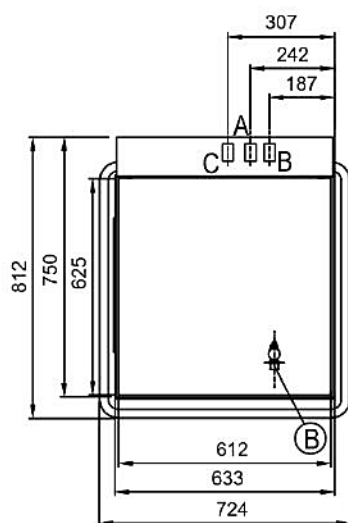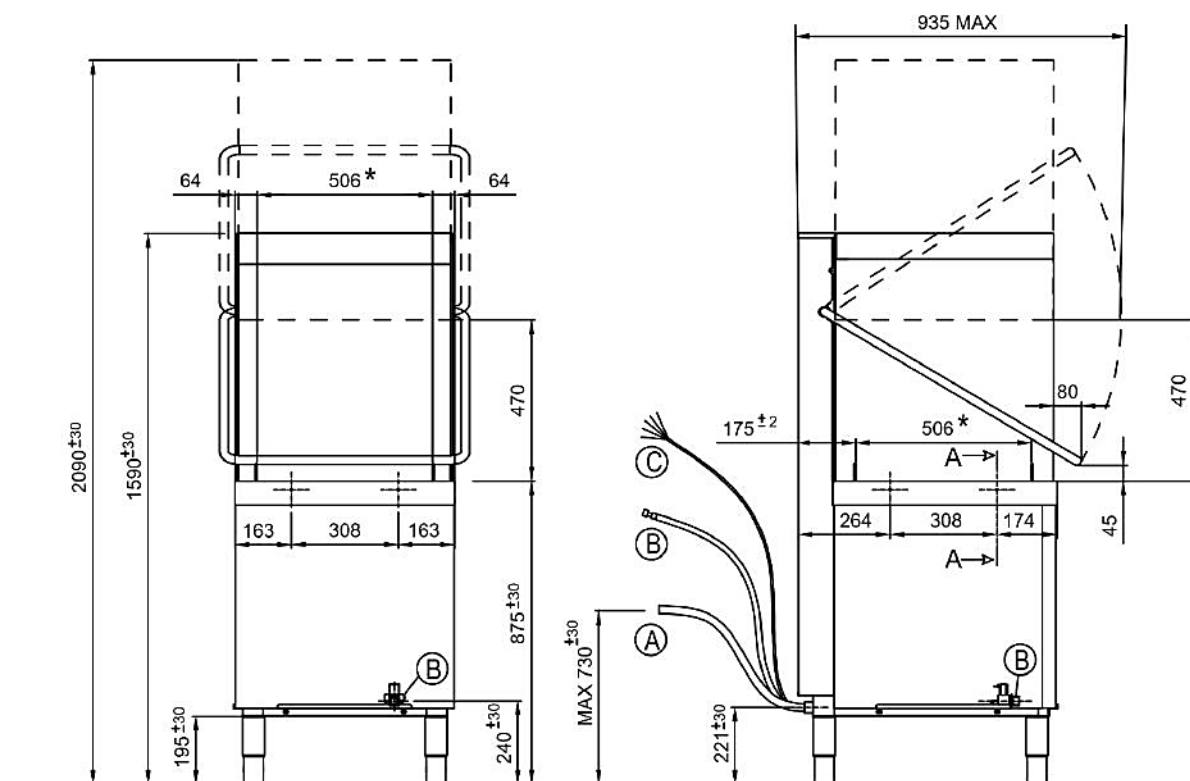

A		Ø 32 mm
B		G 3/4"
C		Power supply

All services must be within 1 meter

All dimensions in mm

*Minimum height (+60mm with adjustable feet) †Minimum height with hood open (+60mm with adjustable feet)
Maidaid reserve the right to alter specs & dimensions without prior notification, all dimensions will be +/- 3mm.
Machines fitted to cold water supply may not be capable of running repeated short cycles. The cycle time will be automatically extended to allow for recovery of correct operating temperatures.

T: 03451 308 070
E: sales@maidaid-halcyon.co.uk
Issue: 3.1 31/07/26