

D55WS

6.5kW 30A
1 Phase



Buttress Group Ltd.
Top Station Road, Brackley,
Northants NN13 7UG, UK



	Overall dimensions (W x D x H)	mm	600 x 615 x 815 (822-837 inc. feet)
	Packaging dimensions (W x D x H)	mm	670 x 690 x 980
	Gross weight	kg	63
	Net weight	kg	55
	Cubic Volume	m ³	0.45
	Rack size (W x D x H)	mm	500 x 500 x 155
	Door opening	mm	400
	Max useable height	mm	370
	Rack guide rails		embossed
	Body construction		fully double skin
	Hood / Door Construction		fully double skin
	Tank construction		moulded
	Tank volume	L	15
	Tank heating element	kW	2.0 (without Thermofuse)
	Surface scrap trays		composite (2mm mesh)
	Wash arms (with cleaning port)		parallel (quick release)
	Wash pump type		dual flow
	Wash pump power	kW	0.47
	Pre-set wash temperatures	°C	60 (Pr1,Pr2,Pr3 adjustable)
	Boiler type		Open
	Boiler volume	L	6.0
	Breaktank		yes
	Boiler heating element	kW	6.0 (2+2+2 without Thermofuse)
	Rinse booster pump		yes
	Rinse booster pump power	kW	0.15
	Pre-set rinse temperatures	°C	82 (Pr1,Pr2,Pr3 adjustable)
	Rinse arms		parallel (quick release)
	Drain system		partial drain
	Drain filter		triple filter
	Drain pump		yes (built into sump)
	Rinse aid dispenser	peristaltic	yes
	Detergent dispenser	peristaltic	yes
	Water softener		yes
	Water consumption per cycle	L	1.4-4.0
	Inlet water pressure	bar	1.0-4.0
	Inlet water temperature	°C	10-50
	Total programs	programs	16
	Total power	kW	6.5
	Fuse	A	30
	Electric connection (as supplied)	V-PH-HZ	230-240V 1N 50Hz
	Configurable to		4.5kW 20A
	Configurable to		2.5kW 13A
	Configurable to		6.5kW 16A 3 phase



	Display	Time (sec)
P button	Pr1	90
	Pr2	115
	Pr3	130
	GLS2	100
	dr	variable
	d1	variable
	CLEn	variable
SP button	LonG	600
	Pr6	160
	GLS1	85
	PLA1	100
	CUP1	115
	bot1	variable
	bot2	variable
	A0300	variable
	Pt1	315

Pegged dish rack	1
Open glass rack	1
Single cutlery rack	1
Electric cable (H07RN-F 3G4)	1
Drain hose (Ø Int 19mm, Ext 24mm)	1
Fill hose (3/4" BSP)	1
Feet (7-22mm)	4

Maidaid reserve the right to alter specification & dimensions without prior notification, all dimensions will be +/- 3mm. Machines fitted to cold water supply may not be capable of running repeated short cycles. The cycle time will be automatically extended to allow for recovery of correct operating temperatures.


T: 03451 308 070
E: sales@maidaid-halcyon.co.uk
Issue: 3.1 31/07/26

D55WS

6.5kW 30A
1 Phase



Buttress Group Ltd.
Top Station Road, Brackley,
Northants NN13 7UG, UK

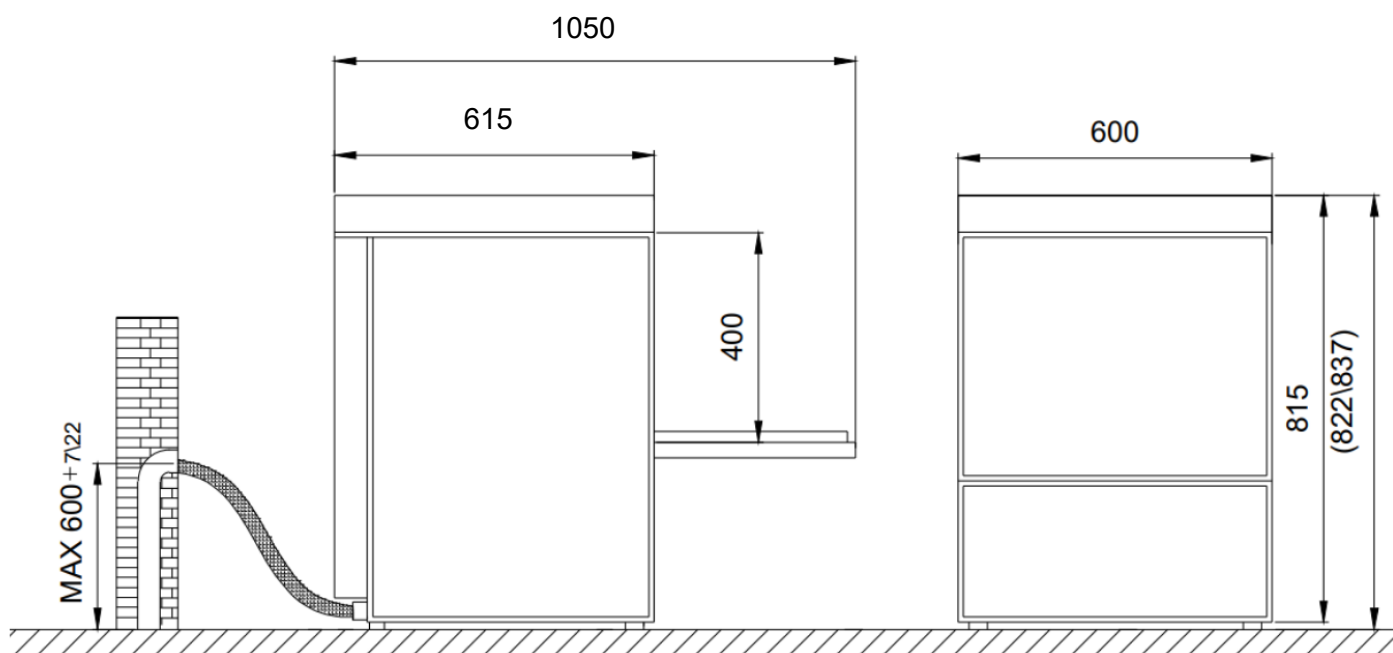

All services must be within 1 metre.

All dimensions in mm.