

EVO216WSHR 10kW 16A 3 Phase



Buttress Group Ltd.
Top Station Road, Brackley,
Northants NN13 7UG, UK



	Overall dimensions (W x D x H)	mm	703 x 750 x 2253* (inc. feet)
↖ ↘	Packaging dimensions (W x D x H)	mm	870 x 830 x 1600
	Gross weight	kg	130
	Net weight	kg	120
	Cubic Volume	m ³	1.1
	Rack size (W x D x H)	mm	600 x 500
☐	Door opening	mm	470
	Max useable height	mm	440
	Rack guide rails		St/St frame with composite guides
	Body construction		double skin
	Hood / Door Construction		double skin fully insulated
	Tank construction		moulded
🚰	Tank volume	L	30
	Tank heating element	kW	3.0 (3x1 with Thermofuse)
	Surface scrap trays		Stainless Steel (1.5mm mesh)
	Wash arms (with cleaning port)		tri-arm parallel (quick release)
🌡️	Wash pump type		3-phase dual flow
	Wash pump power	kW	1 (@50Hz)
	Pre-set wash temperatures	°C	60 (P1,P2,P3 fully adjustable)
	Boiler type		Open
⚙️	Boiler volume	L	7.0
	Breaktank		yes
	Boiler heating element	kW	6.0 (2+2+2 with Thermofuse)
🌡️	Rinse booster pump		Yes
	Rinse booster pump power	kW	0.2
	Pre-set rinse temperatures	°C	82 (P1,P2,P3 fully adjustable)
	Rinse arms		tri-arm parallel (quick release)
🚰	Drain system		partial drain
	Drain filter		triple filter
	Drain pump		yes
	Drain heat recovery		no
💧	Rinse aid dispenser	peristaltic	yes
	Detergent dispenser	peristaltic	yes
🔧	Water softener		yes
	Water consumption per cycle	L	1.8-4.4
🍽️	Inlet water pressure	bar	1.0-4.0
	Inlet water temperature	°C	10-50
	Total programs	programs	18
⚡	Total power	kW	10.0
	Fuse	A	16
	Electric connection (as supplied)	V-PH-HZ	400V 3N 50Hz
	Configurable to		n/a
	Heat recovery fan	W	76
Ⓡ	Heat recovery air flow	m ³ /h	405
	Residual heat emission SENSATIVE	kW	0.6
	residual heat emission LATENT	kW	0.6



Available Programs

General Cluster:

P1 (60s – 82/60°C),
P2 (80s – 82/60°C),
P3 (100s – 82/60°C),
G2, Drain

Other Clusters including 18 Programs:

Fine
Canteen
Bar / Bistro
Deli / Shop
Pastry Shop
Health Care
Fast Food
Festivals

Supplied with

(Standard configuration)

Pegged dish rack (600x500)	1
Open Glass rack (500x500)	1
Single cutlery rack	1
Electric cable (H07RN-F 5G2.5)	1
Drain hose (Ø Int 25mm, Ext 31mm)	1
Fill hose (¾" BSP)	1
Feet	4


*Minimum height (+60mm with adjustable feet) †Minimum height with hood open (+60mm with adjustable feet)
Maidaid reserve the right to alter specification & dimensions without prior notification, all dimensions will be +/- 3mm. Machines fitted to cold water supply may not be capable of running repeated short cycles. The cycle time will be automatically extended to allow for recovery of correct operating temperatures.

T: 03451 308 070
E: sales@maidaid-halcyon.co.uk
Issue: 2.0 09/03/26

EVO216WSHR 10kW 16A 3 Phase



Buttress Group Ltd.
Top Station Road, Brackley,
Northants NN13 7UG, UK

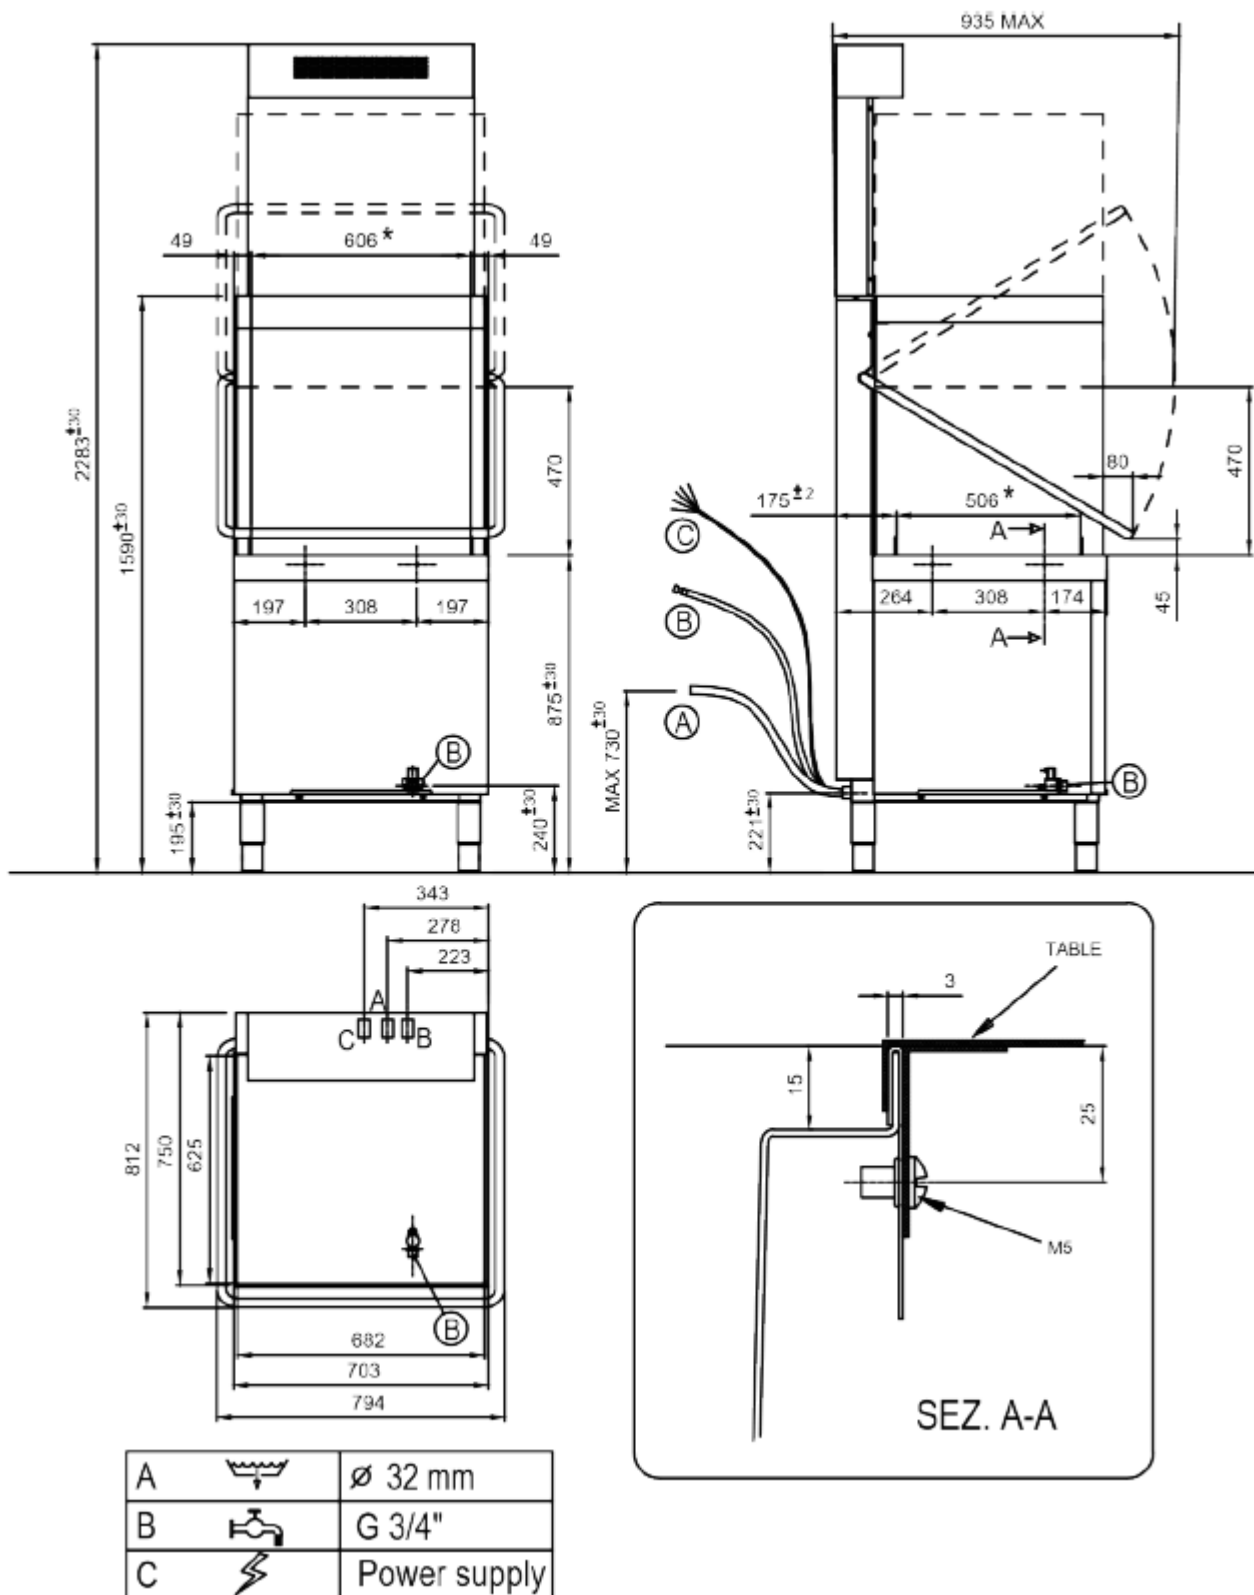

all dimensions in mm

*Minimum height (+60mm with adjustable feet) †Minimum height with hood open (+60mm with adjustable feet)
Maidaid reserve the right to alter specification & dimensions without prior notification, all dimensions will be +/- 3mm. Machines fitted to cold water supply may not be capable of running repeated short cycles. The cycle time will be automatically extended to allow for recovery of correct operating temperatures.

T: 03451 308 070
E: sales@maidaid-halcyon.co.uk
Issue: 2.0 09/03/26