


RANGE GUIDE

C Range Pass Through



Pass Through

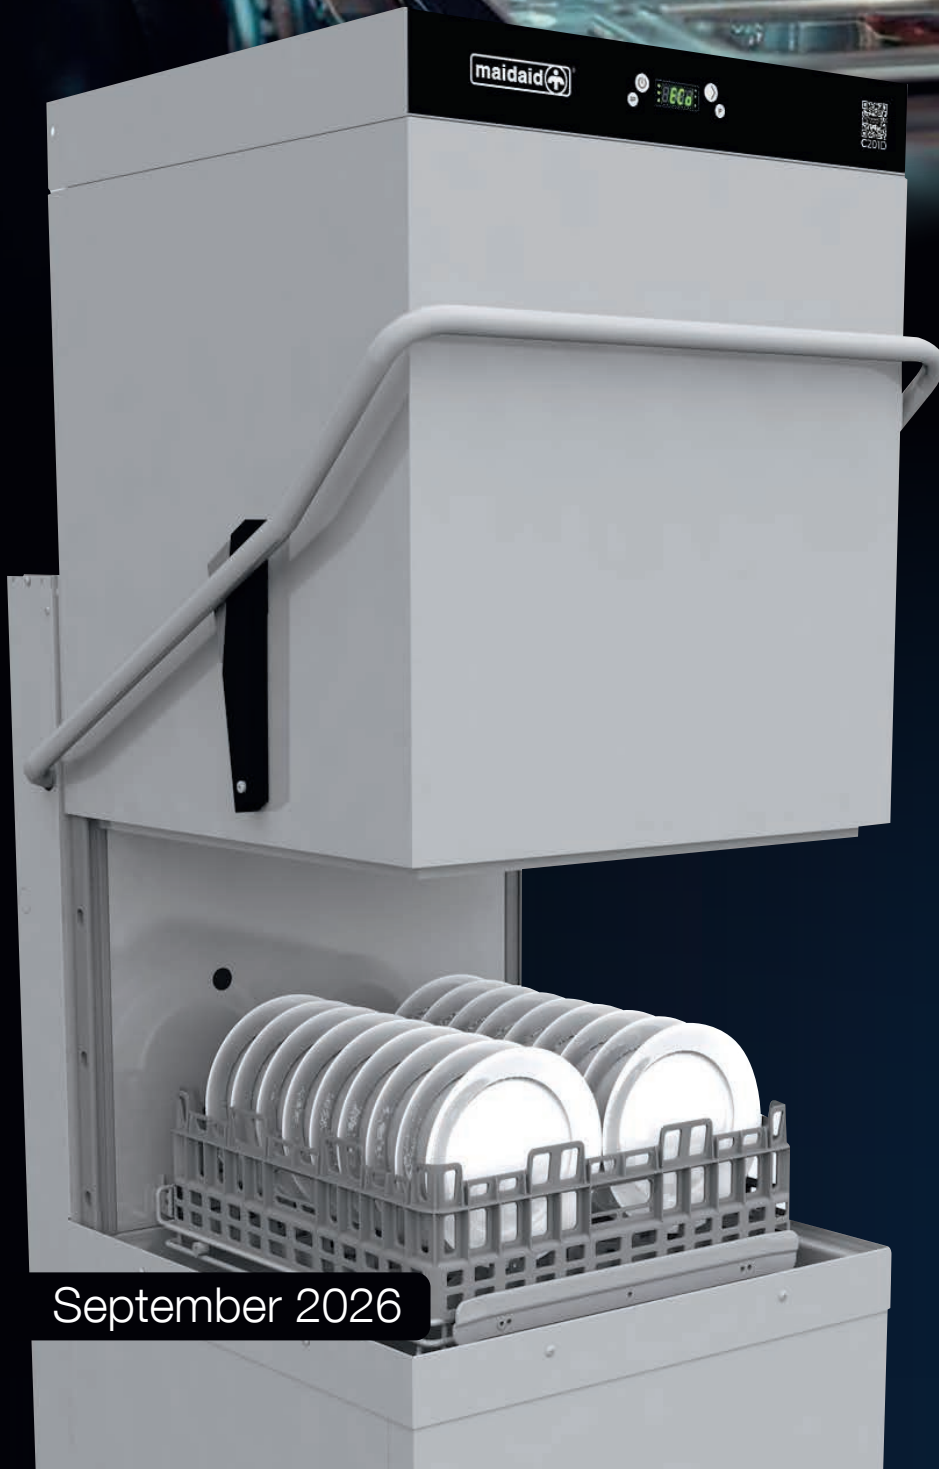

September 2026

built for the demands of modern hospitality



10 **versatile** programs



From only 1.4 ltr **water per cycle**



0.20 kWh **low energy** consumption



EN17735 **hygiene tested**



EN63136 **performance tested**



Drain pump **as standard**

range at a glance

Independent certified testing confirms C Range's outstanding performance across all key metrics

Wash Effectiveness



100%

Xc

from 100% - full cleaning power

Energy Consumption



0.20

kWh (Ec)

per cycle - ultra low energy use

Water Consumption



1.4

ltr (Wc)

ultra low water per cycle (eco cycle)

Cycle Time from



40

secs (Tc)

fast turnaround per wash cycle

Power Use



0.19

kW (Pu)


low power draw during operation

range overview

Old Range	New Range
SUSTAINABILITY WITHOUT COMPROMISE & LOWER COST OVER TIME	
Standard cycle water use: 2.0 ltr	→ Standard cycle water use: 1.6 ltr
	→ Low energy consumption from 0.20 kWh
Single skinned	→ Single skinned
RELIABILITY YOU CAN DEPEND ON	
EN17735 Hygiene standard	→ EN17735 Hygiene tested
	→ EN63136 Performance tested
BUILT FOR HIGH DEMAND ENVIRONMENTS	
7 Programs	→ 10 Programs
LED soft touch 4 button control	→ LED digital display - 4 button control
Old handle - poor quality ergonomics	→ New stainless steel handle: improved ergonomics
Optional drain pump	→ Drain pump included on all models
Dual tank filter	→ Triple tank filter
Control panel in base	→ Control panel in hood (eye height)
	→ Easy to remove wash arms and tank system
A LONG TERM PARTNERSHIP APPROACH	
2 year warranty	→ 2 year warranty



functionality & technology

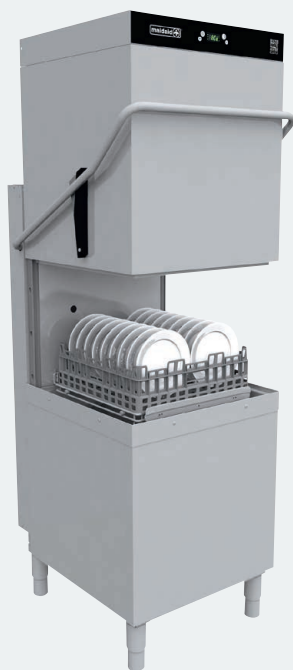

The C Range delivers high performance with simple, intuitive operation. Versatile and reliable, it's ideal for operations that demand quality and efficiency while minimising energy and water consumption.

Key Attributes

- Eye level capacitive touch LED display
- Drain pump fitted on all models
- Low water usage (from 1.4L)
- Improved energy efficiency
- Up to 10 programs
- Triple filter system
- Surface scrap tray filters supplied as standard
- Proven performance, tested to EN 17735 & EN 63136:2019
- 18 plate rack capacity (500x500 basket)
- 2 year warranty

Intelligent Functions & Advanced Technologies		C201D	C205WS	C205WSHR
SUSTAINABILITY	Patented dual flow wash pump - reduces power consumption whilst retaining wash efficiency	•	•	•
	Selectable thermostop ensures optimum rinse temperatures	•	•	•
	Partial Drain System provides cleaner wash water for better wash results	•	•	•
	Triple filtration system that reduces pump wear and tear	•	•	•
	Highly efficient rinse system that delivers perfect wash results with minimal water consumption	•	•	•
	Selectable energy saving mode	•	•	•
	Patented washarm geometry optimises water distribution whilst maintaining cleaning performance	•	•	•
	Steam heat recovery that reduces rinse water heating energy usage by 25%			•
OPERATION	Quick release wash arms with removable caps for easier cleaning	•	•	•
	Easy tank access and a mirrored finish makes maintenance and cleaning easier	•	•	•
	Soft start pump that protects delicate washware & prolongs pump life	•	•	•
	Alarms menu with hi-level information retrieval	•	•	•
VERSATILITY	Accurate detergent & rinse aid peristaltic dosing pumps as standard	•	•	•
	Multiple power configurations available	•	•	•
	Automatic continuous internal water softener		•	•
	Breaktank	•	•	•
	Bottle wash system for dedicated bottle washing	•	•	•



User Interface

Four button capacitive touch LED display ensures clear visibility of temperatures and system messages. The twin colour coded indicator bars provide status updates and operational self diagnostics, while the robust, scratch-resistant synthetic glass front panel combines durability with sleek, modern design.

Technical Data		C201D	C205WS	C205WSHR
Dimensions (W x D x H)	mm	633 x 750 x 1560 [‡] (2060) [≠]	633 x 750 x 1560 [‡] (2060) [≠]	633 x 750 x 2253 [‡]
Rack size (W x D)	mm	500 x 500	500 x 500	500 x 500
Maximum useable height	mm	440	440	440
Door opening	mm	470	470	470
Theoretical productivity	mm	48	48	48
Effective productivity*	Racks/h	38	38	38
Wash tank element	Racks/h	3.0	3.0	3.0
Boiler element	kW	6.0 [†]	6.0 [†]	6.0 [†]
Wash pump	kW	0.47	0.47	0.47
Tank capacity	L	20	20	20
Racks - open / pegged		1 / 1	1 / 1	1 / 1

* Based on the shortest standard program & allowing 20 seconds for reloading. Cycle times may vary depending on local conditions/services.

[‡] Minimum height including feet (+60mm with adjustable feet).

[†] Max rating - dependent on model power configuration. See Tech Sheet for more info.

[≠] Minimum height including feet with hood open (+60mm with adjustable feet).

Packaging Specs		C201D	C205WS	C205WSHR
Gross weight	kg	99	105	105 + 19 (heat recovery unit)
Cubic volume	m ³	0.98	0.98	0.98 + 0.18 (heat recovery unit)
Dimensions (W x D x H)	mm	760 x 840 x 1600	760 x 840 x 1600	760 x 840 x 1600 720 x 760 x 310 (heat recovery unit)

Power Supply		C201D	C205WS	C205WSHR
Electric connection	V-Ph-Hz	230-240V 1N 50Hz		
Fuse	A	32		
Total Power	kW	6.5		
Electric connection	V-Ph-Hz	400V 3+N 50Hz		
Fuse	A	16		
Total Power	kW	8.5		

Water Connection		C201D	C205WS	C205WSHR
Inlet water pressure	Bar	1.0 - 4.0	1.0 - 4.0	1.0 - 4.0
Water inlet temp	°C	10 - 50	10 - 50	10 - 50
Water connection	BSP	3/4"	3/4"	3/4"

Cycle Information		C201D	C205WS	C205WSHR
Wash cycles		3		
Special cycles		5		
Wash cycle times*	s	75 - 115		
Cleaning cycles		2		
Water consumption per cycle	L	1.4 x 4.0		
Wash temperature*	°C	60		
Rinse temperature*	°C	82		

*Based on standard programs P1, P2, P3 or G1, G2, G3 (model dependent), as specified on model spec sheets.

Independent results from EN63136 testing vs comparable specification machines across the market.

Maidaid reserve the right to alter specs & dimensions without prior notification, all dimensions will be +/- 3mm.

Issue 4.0 ; 20/08/26

The Engine Shed
Top Station Road, Brackley NN13 7UG
t: 0345 130 8070
e: sales@maidaid-halcyon.co.uk
www.maidaid.co.uk